
ENFORCER® Video

Modular Snap-in Passive Video Baluns


Range up to 2,000 ft. (610m)

EVT-PBM-V17 Male Gold-Plated BNC
EVT-PBM-V27 Female Gold-Plated BNC

Power | RJ-45 | Compact Size | Long Range | Modular Snap-In | Surge Protection

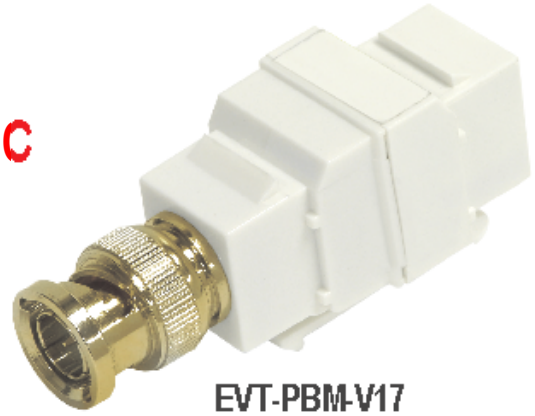

EVT-PBM-V17

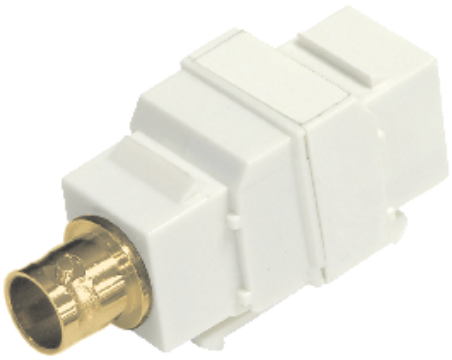


EVT-PBM-V27

ENFORCER Modular Snap-in Passive Video Baluns are the easy way to quickly install any style of CCTV camera throughout an entire building or an entire campus without expensive coax cable. These baluns fit in standard modular single-gang wall plates with a 9/16" x 5/8" (16 x 14.5 mm) hole. They can be used to prewire a new building, or to retrofit an existing building. Just put one plate with a snap-in video balun in each room which might be protected by a CCTV camera, and run low-cost CAT 5 or CAT 5e cable from the balun to a centralized DVR or passive video hub. Includes surge protection and built-in RJ-45 female connector on back for easy plug-in of low-cost CAT 5 or CAT 5e cable with standard RJ-45 male plug.

Technical Specifications:

Video Format	RS170, NTSC, PAL, SECAM, CCIR
Maximum Input	1vpp
Insertion Loss	< 2dB per pair from DC ~ 8 Mhz
Return Loss	>-15dB from DC ~ 8 Mhz
Frequency Response	DC ~ 8 Mhz
Attenuation	6.6 dB/1000 ft. @ 1MHz
Common Mode Rejection	40 dB @ 8 MHz
Impedance Coax, Male BNC	75 Ohms @ 1 MHz
Power	No power required
Surge Protection	Transient immunity: 6000V at 1.2 ms * 50 ms
Temperature Range	32°~131°F (-0°~55°C)
Humidity Range	0 ~ 95%
Wire Type	UTP (Unshielded Twisted Pair)
Wire Category	Category 2 or better. Best if > CAT5e.
UTP Connection	RJ-45. Pins 7 & 8. Reverse polarity sensitive.
Case	ABS Plastic

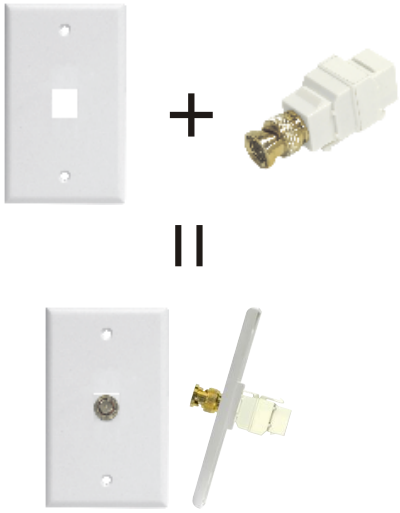

The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM®
16842 Millikan Avenue, Irvine, CA 92606
1.949.261.2999 (CA & Int'l) 1.800.662.0800 Fax: 1.949.261.7326
Email: info@seco-larm.com Website: www.seco-larm.com